



AN ISO 9001 : 2015
CERTIFIED COMPANY

BONNA-FLEX[®]

HRC COUPLINGS




CATALOGUE NO. C2-BBCP - NO 15

Manufacturer & Exporter :

HASMUKHLAL & BROTHERS



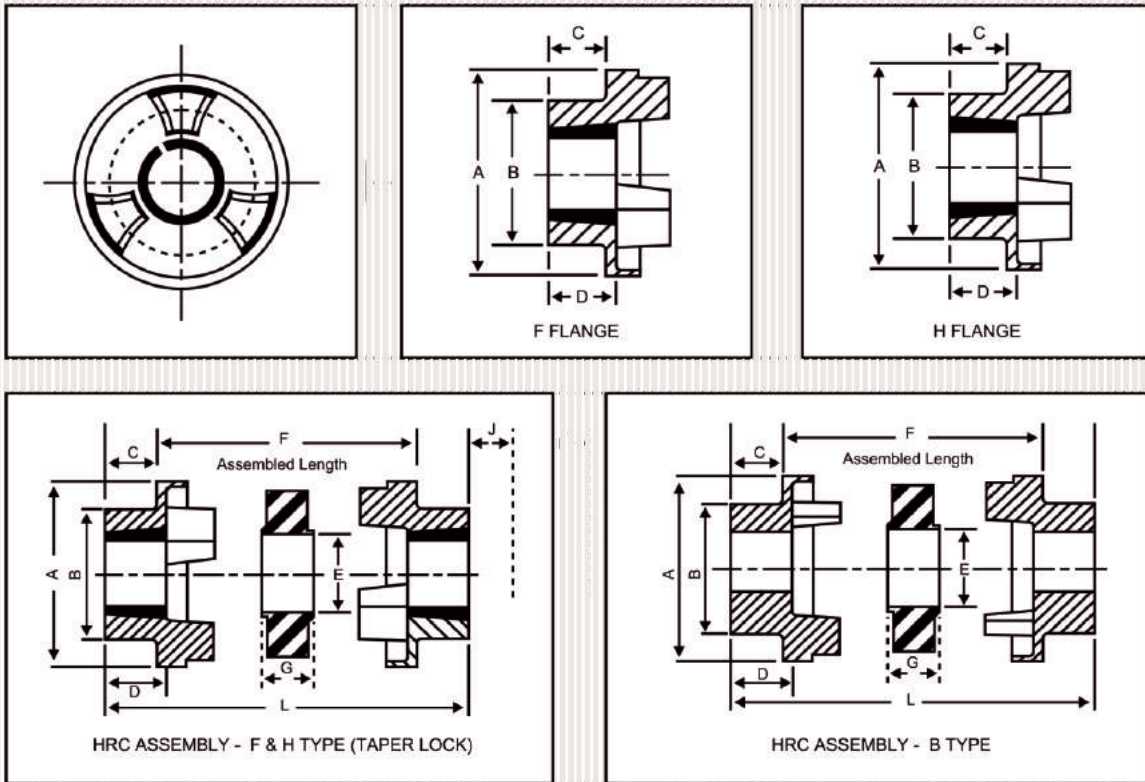

HRC Couplings:

- ◆ Best Suitable for engine shafts & power transmission
- ◆ Simple & Fail-safe design
- ◆ Ease of maintenance

Technical Details

- ◆ Available from 70 mm to 280 mm size
- ◆ Working temp ranges from -40°C to 85 °C
- ◆ Max torque up to 7200 Nm
- ◆ Power Rating from 0.33 kW to 726 kW

DIMENSIONS

Size	Power at 100 rpm kW	Type BF & BH								Type B									
		TLB Size	Min. Bore	Max. Bore	C	D	F	L	J*	Min. Bore	Max. Bore	C	D	F	L	A	B	E	G
70	0.33	1008	09	25	20.0	24	26.0	66.0	29	10	32	20	24	26.0	66.0	69	60	31	18.0
90	0.84	1108	09	28	19.5	24	31.5	70.5	29	10	35	26	30	30.5	82.5	85	70	32	22.5
110	1.68	1210	11	32	18.5	27	46.0	83.0	38	10	55	37	45	45.0	119.0	112	100	45	29.0
110A	1.68	1610	14	42	18.5	27	46.0	83.0	38	-	-	-	-	-	-	112	100	45	29.0
130	3.30	1610	14	42	18.0	27	54.0	90.0	38	14	60	47	56	54.0	148.0	130	105	50	36.0
150	6.28	2012	14	50	23.5	34	61.0	108.0	44	19	70	50	60	60.0	160.0	150	115	62	40.0
180	9.95	2517	16	60	34.5	47	74.0	143.0	48	35	80	58	70	73.0	189.0	180	125	77	49.0
230	20.90	3020	25	75	39.5	53	86.5	165.5	55	38	100	77	90	85.5	239.5	225	155	99	59.5
280	33.00	3525	35	90	51.0	67	106.5	208.5	67	48	115	90	105	104.5	284.5	275	206	119	74.5

* J - Wrench clearance to allow for tightening and loosening the bush on the shaft.